
## TAMS INTERTIDAL

Spill Response / Dive Support / Crew Transfer / Survey

# **@TAMS**GROUP

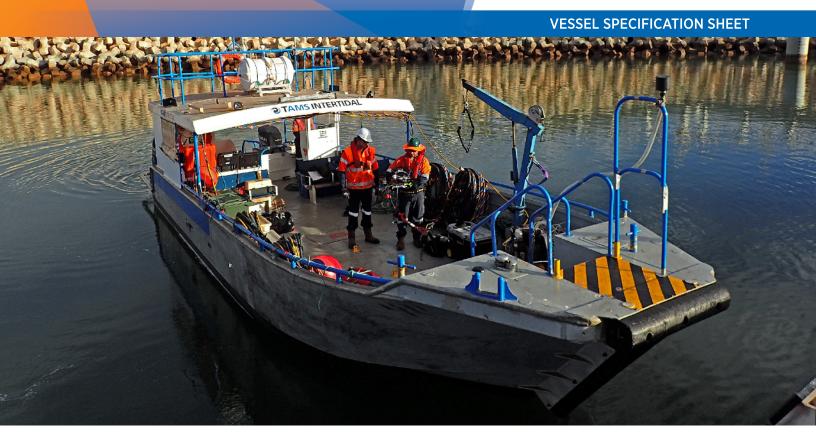

#### **OVERVIEW**

Primary Specification	
Registry	AMSA
Class	NSCV 2C
Unique Identifier	453455
Length (Overall)	14.2m
Length (Survey)	12.67m
Breadth (Moulded)	4.0m
Design Draft (lightship)	0.3m
Gross Registered Tonnage	11T
Clear Deck Space	16.5m <sup>2</sup>
Cargo Deadweight	900 kg (no passengers)
Deck Loading	1T/m <sup>2</sup>
Max Passengers	12 pax + 2 crew
Accommodation	N/A (Toilet only)

Machinery	
Propulsion	Conventional prop.
Main Engines	2 x 300HP Suzuki Outboards
Total Propulsion Power	600 HP
Gear Box	Outboard Drive
<b>Operational Performance</b>	
Full Operating Speed	28 knots
Economic Operating Speed / Consumption	20 knots / 100L / hour

The data on this specification is published in good faith and for general information purpose only. It does not warrant its accuracy or completeness and to the full extent allowed by law excludes liability.

### **OVERVIEW**

Deck Machinery	
Fuel	550L (2 x 275L tanks)
Fresh Water	NA
Bilge and Ballast Pump	Yes
Deck Machinery	
Anchor Windlass	1 x Electric Anchor Winch 1 x Manual Winch
Capstan	750kg electric (optional)
Deck Crane (Davit)	MOB recovery only
Transfer Locations	Port, Bow and Stern

#### Navigational/Communications

Simrad
Yes
Yes
Simrad
Simrad



### **OTAMS** GROUP

The data on this specification is published in good faith and for general information purpose only. It does not warrant its accuracy or completeness and to the full extent allowed by law excludes liability.